



**Global Yeou Diann Electric Industrial Co., Ltd**

No. 378, Kaisyuan 4th Rd., Cianjhen District,  
Kaohsiung City, 806, Taiwan(R.O.C)

TEL: 886-7-813-2957 FAX: 886-7-813-2967~68

## Test Verification of Conformity

On the basis of the tests undertaken, the samples(s) of the below product have been found to comply with the essential requirements of the referenced specifications at the time of the tests were carried out.

Applicant Name & Address : GLOBAL YEOU DIANN ELECTRIC INDUSTRIAL CO.,LTD.  
No.378,Kaisyuan 4<sup>th</sup> Rd., Cianjhen District, Kaohsiung City  
806, Taiwan

Product(s) Tested : SWITCHING ADAPTER

Brand name : AMIGO

Ratings and principal Characteristics : Input: 100-240VAC, 50/60Hz, 1.2A  
Output: 5Vdc, 4.0A

Model(s) : AMS241-0504000FV, AMS241-0504000FB,  
AMS241-0504000F, AMS241-0504000FF,  
AMS241-0504000F1, AMS241-0504000F2,

Relevant : ☒ COMMISSION REGULATION (EU) 2019/1782 of 1 October  
2019 laying down ecodesign requirements for external power  
supplies pursuant to Directive 2009/125/EC of the European  
Parliament and of the Council and repealing Commission  
Regulation (EC) No 278/2009.

NOTE: This verification is part of the full test report(s) and should be read in conjunction with it.

Prepared by:

Signature: Qiongfang Zheng

Print: Qiongfang Zheng

Date: 2020-3-10

Approved by:

Signature: Sunrise Hsiao

Print: Sunrise Hsiao

Date: 2020-3-10

**Global Yeou Diann Electric Industrial Co., Ltd**

No. 378, Kaisyuan 4th Rd., Cianjhen District,

Kaohsiung City, 806, Taiwan(R.O.C)

TEL: 886-7-813-2957 FAX: 886-7-813-2967~68

**External Power Supplies Energy Efficiency Test Report**

Applicant:	GLOBAL YEOU DIANN ELECTRIC INDUSTRIAL CO.,LTD.
Address:	No.378,Kaisyuan 4th Rd., Cianjhen District, Kaohsiung City 806, Taiwan
Product:	SWITCHING ADAPTER
Trade Name:	AMIGO
Model:	AMS241-0504000FV, AMS241-0504000FB, AMS241-0504000F,AMS241-0504000FF, AMS241-0504000F1, AMS241-0504000F2,
Rating:	5Vdc, 4.0A
Input:	100-240VAC, 50/60Hz, 1.2A
Output:	5Vdc, 4.0A
Tested by (printed name and signature) :	Yong Liang <i>Yong Liang</i>
Reviewed by (printed name and signature) :	Qiongfang Zheng <i>Qiongfang Zheng</i>
Approved by (printed name and signature) :	Sunrise Hsiao <i>Sunrise Hsiao</i>
Date of issue:	2020-3-10
Testing procedure:	EN 50563:2011+A1:2013: External a.c. - d.c. - a.c. power supplies - Determination of no-load power and average efficiency of active modes. EN 50564:2011: Electrical and electronic household and office equipment- Measurement of low power consumption.
Conclusion:	From the results of our testing, we are hereby declare that the product COMPLY WITH COMMISSION REGULATION (EU) 2019/1782 of 1 October 2019 laying down ecodesign requirements for external power supplies pursuant to Directive 2009/125/EC of the European Parliament and of the Council and repealing Commission Regulation (EC) No 278/2009.



Global Yeou Diann Electric Industrial Co., Ltd  
No. 378, Kaisyuan 4th Rd., Cianjhen District,  
Kaohsiung City, 806, Taiwan(R.O.C)  
TEL: 886-7-813-2957 FAX: 886-7-813-2967~68

#### Test program and conditions:

1. All tests was carried out in a room with an air speed immediately surrounding the UUT of  $\leq 0.5$  m/s.
2. The ambient temperature was maintained at 25 °C throughout the test.
3. Measurements were mode for supply voltage of 115V/60Hz and 230V/50Hz.
4. The load conditions specified in Table 1 shall be achieved by using a resistive load. The resistive load may be a variable resistor, an electronic test load, or a combination thereof, having a power factor of 0.95 to 1. When an electronic load is used, the constant current mode is used.
5. Test set-up according following figure 1.

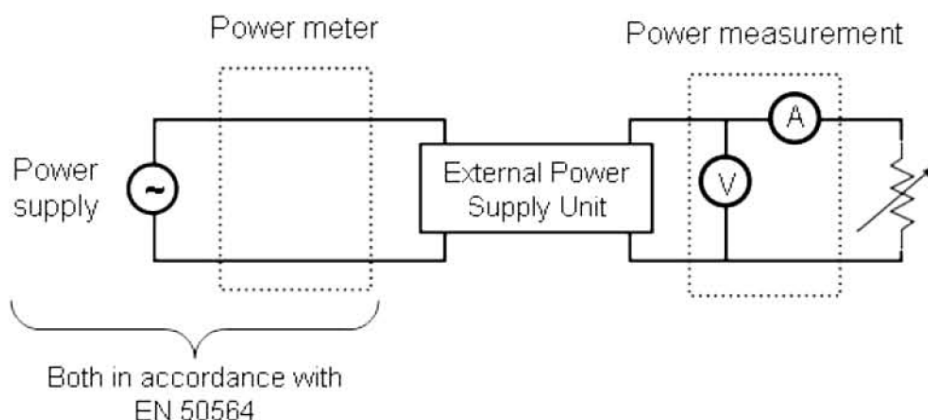


Figure 1

#### 6. Testing sequence:

The tests shall be conducted as follows:

- a) Using the set-up in figure 1 apply load condition as specified in Table 1.
- b) The output of the EPS shall be maintained at load condition 1 for at least 30 minutes, this is the warm-up period. After this warm-up period the AC input power is monitored for a period of 5 minutes to assess stability. If the input power level does not change by more than 5% during these 5 min the measurement is considered to be stable and the measurements are recorded at the end of the 5 minute period. If the AC input power is not stable over a 5 minute period, stability shall be determined in accordance with EN 50564:2011, 5.3. If load condition 1 cannot be maintained for either warm-up period or the stability period then compliance with this standard cannot be determined.



*Global Yeou Diann Electric Industrial Co., Ltd*  
No. 378, Kaisyuan 4th Rd.,Cianjhen District,  
Kaohsiung City, 806, Taiwan(R.O.C)  
TEL: 886-7-813-2957 FAX: 886-7-813-2967~68

- c) Immediately subsequent to b) load conditions 2 through 5 are measured in sequence each with a 5 minute period for determining stability. If is not necessary to repeat the warm-up period unless the EPS is not stable within each of the 5 minute periods. If AC input is not stable over a 5 minute period, stability shall be determined in accordance with EN 50564:2011, 5.3. When it is not possible to immediately follow the preceding test condition a warm-up period of at least 30 min shall be introduced using the relevant load condition.
- d) If the external power supply has a user-selectable output voltage, the above sequence is conducted first with the highest output voltage setting and then the sequence is repeated with the lowest voltage setting.
7. Power consumption of the UUT at each Load Condition 1-5 is the difference between the DC output power (W) at that Load Condition and the AC input power (W) at that Load Condition. The power consumption of Load Condition 6 (no load) is equal to the AC input power (W) at that Load Condition.

**TABLE 1—LOADING CONDITIONS FOR UNIT UNDER TEST**

Loading Condition 1	100% of Derated Nameplate Output Current $\pm 2\%$ .
Loading Condition 2	75% of Derated Nameplate Output Current $\pm 2\%$ .
Loading Condition 3	50% of Derated Nameplate Output Current $\pm 2\%$ .
Loading Condition 4	25% of Derated Nameplate Output Current $\pm 2\%$ .
Loading Condition 5	10% of Derated Nameplate Output Current $\pm 2\%$ .
Loading Condition 6	0%.



Global Yeou Diann Electric Industrial Co., Ltd  
No. 378, Kaisyuan 4th Rd.,Cianjhen District,  
Kaohsiung City, 806, Taiwan(R.O.C)  
TEL: 886-7-813-2957 FAX: 886-7-813-2967~68

Test data:

Load conditions	No load	Active Power Values				
115Vac 60Hz	0%	10%	25%	50%	75%	100%
Total Harmonic Distortion(THD)	0.639	0.643	0.648	0.662	0.672	0.681
RMS Input Power (W)	0.0284	2.352	5.823	11.649	17.662	23.881
True Power Factor (W/VA)	0.064	0.368	0.4325	0.494	0.532	0.559
Output Voltage (Vdc)	5.165	5.127	5.072	4.981	4.89	4.8
Output Current (mA)	--	400	1000	2000	3000	4000
Active Output Power (W)	--	2.0508	5.072	9.962	14.67	19.20
Power Consumed (W)	0.0284	0.3012	0.751	1.687	2.992	4.681
Efficiency (%)	/	87.193	87.102	85.518	83.059	80.398
Average Efficiency(%)	/	/	84.019			
Load conditions	No load	Active Power Values				
230Vac 50Hz	0%	10%	25%	50%	75%	100%
Total Harmonic Distortion(THD)	0.401	0.43	0.438	0.449	0.484	0.501
RMS Input Power (W)	0.061	2.439	5.966	11.77	17.477	24.017
True Power Factor (W/VA)	0.109	0.3012	0.3511	0.3785	0.3943	0.4121
Output Voltage (Vdc)	5.165	5.128	5.073	4.983	4.892	4.802
Output Current (mA)	--	400	1000	2000	3000	4000
Active Output Power (W)	--	2.0512	5.073	9.966	14.676	19.208
Power Consumed (W)	0.061	0.3878	1.176	1.804	2.801	4.809
Efficiency (%)	/	84.100	85.031	84.672	83.973	79.976
Average Efficiency(%)	/	/	83.413			

#### TEST RESULTS:

Test item	Required	115V, 60Hz	230V, 50Hz	Verdict
No load power (W)	$\leq 0.10W$	0.0284	0.061	Pass
Average efficiency (%) <sup>1)</sup>	$\geq 83.084$	84.019	83.413	Pass
Efficiency of 10% full load (%)	N/A	87.193	84.100	Ref.only
Complies with performance mark	VI			

Note: <sup>1)</sup> the average efficiency of 25%, 50%, 75% and 100% full load.



Global Yeou Diann Electric Industrial Co., Ltd  
No. 378, Kaisyuan 4th Rd.,Cianjhen District,  
Kaohsiung City, 806, Taiwan(R.O.C)  
TEL: 886-7-813-2957 FAX: 886-7-813-2967~68

# THE LIMITS FOR EXTERNAL POWER SUPPLY:

Single-Voltage External Power Supply, Basic-Voltage			
Nameplate Output Power (P <sub>out</sub> )	Minimum Average Efficiency in Active Mode	Maximum Power in No-Load Mode [W]	
		AC-AC	AC-DC
P <sub>out</sub> ≤1W	≥0.5 x P <sub>out</sub> +0.16	≤0.210	≤0.100
1W<P <sub>out</sub> ≤49W	≥0.071 x ln(P <sub>out</sub> )-0.0014 x P <sub>out</sub> +0.67	≤0.210	≤0.100
49W<P <sub>out</sub>	≥0.880	≤0.210	≤0.210
Single-Voltage External Power Supply, Low-Voltage			
Nameplate Output Power (P <sub>out</sub> )	Minimum Average Efficiency in Active Mode	Maximum Power in No-Load Mode [W]	
P <sub>out</sub> ≤1W	≥0.517 x P <sub>out</sub> +0.087	≤0.100	
1W<P <sub>out</sub> ≤49W	≥0.0834 x ln(P <sub>out</sub> )-0.0014 x P <sub>out</sub> +0.609	≤0.100	
49W<P <sub>out</sub>	≥0.870	≤0.210	
Multiple-Voltage External Power Supply			
Nameplate Output Power (P <sub>out</sub> )	Minimum Average Efficiency in Active Mode	Maximum Power in No-Load Mode [W]	
P <sub>out</sub> ≤1W	≥0.497 x P <sub>out</sub> +0.067	≤0.300	
1W<P <sub>out</sub> ≤49W	≥0.075 x ln(P <sub>out</sub> ) +0.561	≤0.300	
P <sub>out</sub> >49W	≥0.860	≤0.300	

Note:

Single-voltage external AC-DC power supply means an external power supply that is designed to convert line voltage AC into lower-voltage DC output and is able to convert to only one DC output voltage at a time.

Single-voltage external AC-AC power supply means an external power supply that is designed to convert line voltage AC into lower-voltage AC output and is able to convert to only one AC output voltage at a time.

Low-voltage external power supply means an external power supply with a nameplate output voltage less than 6 volts and nameplate output current greater than or equal to 550 milliamps. Basic-voltage external power supply means an external power supply that is not a low-voltage power supply.

Equipment List:



*Global Yeou Diann Electric Industrial Co., Ltd*  
No. 378, Kaisyuan 4th Rd.,Cianjhen District,  
Kaohsiung City, 806, Taiwan(R.O.C)  
TEL: 886-7-813-2957 FAX: 886-7-813-2967~68

Equipment Name	Manufacturer	Model	Reg. No.	Cal. Date	Next Cal.
AC Source	GVERFINE	GK10010	RD-354	2020.1.1	2020.12.31
Digital Power Meter	YOKOGAWA	WT310E	RD-339-12	2019.7.16	2020.7.15
DC Electronic Load	ITECH	HT3150+	TQC-0228	2020.2.2	2021.1.31